Rebuild Switchback, build new step with anchor rocks.




Repair heavily eroded gully in trail by: building and placing 3 steps with associated anchor rocks, wall and crush fill.



Repair heavily eroded gully in trail by: rebuilding switchback and placing 1 step with associated anchor rocks, walls and crush fill.



Repair deeply eroded trail and place substantial rock water bar and anchor rocks

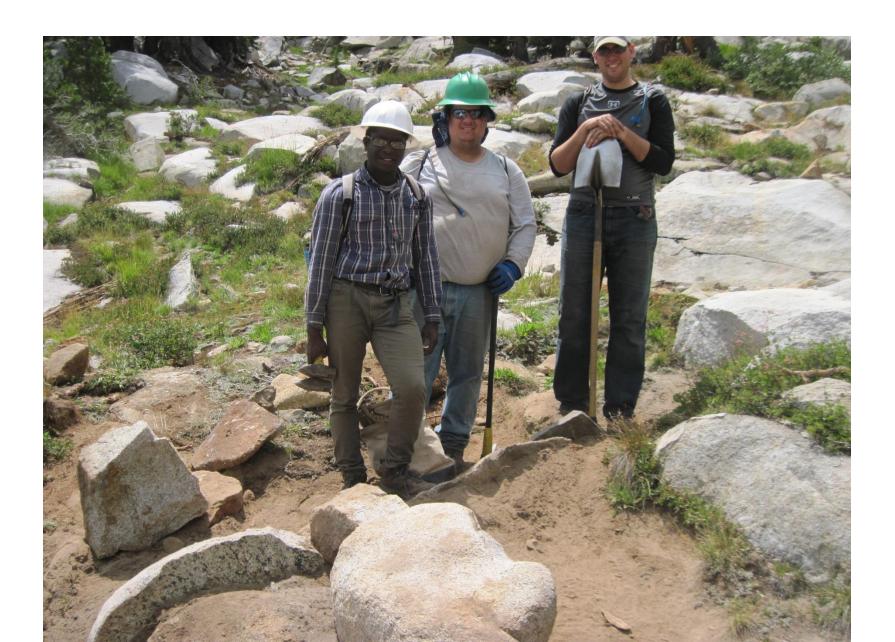


Rebuild existing switchback, rock walls and crush fill



Repair heavily eroded gully. Place step, anchors and crush fill.



Repair deeply eroded switchback: Rebuild rock walls, place two steps, place crush fill

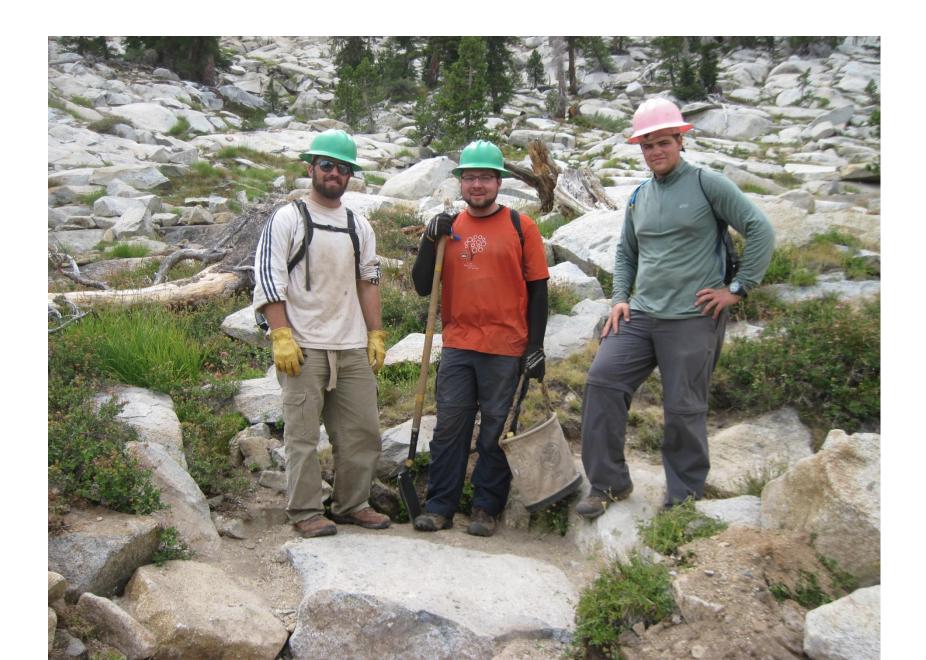


Repair heavily rutted trail. Install two massive rock steps, rock walls and crush fill



Repair gullied trail. Place 3 exceptionally large rock steps with associated anchors and fill.



Repair rutted trail, rebuild switchback, place step, anchors, wall and crush fill

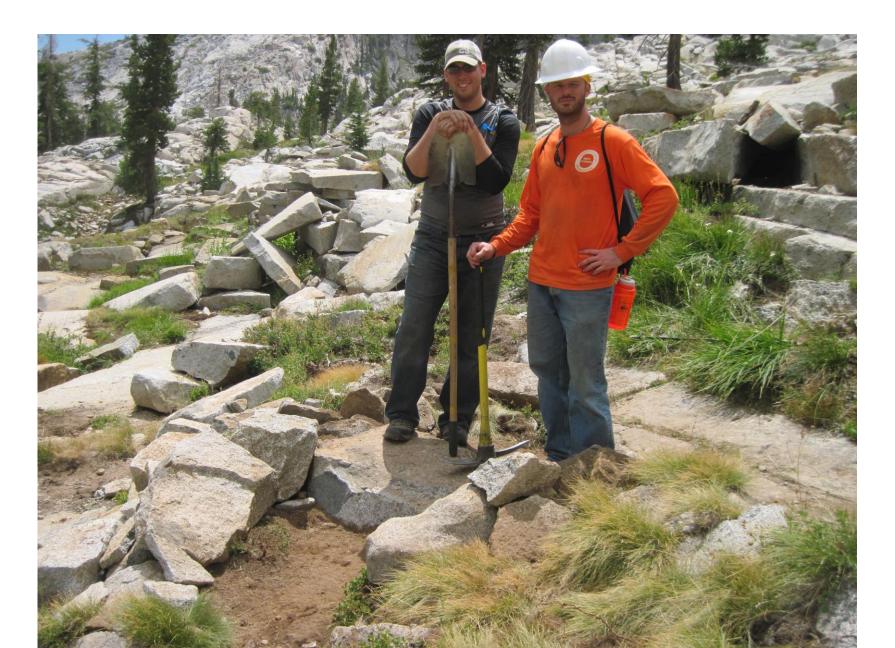

Repair heavily eroded gully in trail. Place 1 step with associated anchor rocks, walls and crush fill.



Repair heavily eroded gully in trail. Place 2 steps with associated anchor rocks, walls and crush fill.



Repair heavily eroded gully in trail. Place 1 step with associated anchor rocks, walls and crush fill.



Repair heavily eroded gully in trail. Place 2 steps with associated anchor rocks, walls and crush fill.



Repair heavily eroded gully in trail. Place 2 steps with associated anchor rocks, walls and crush fill.



Repair deeply eroded trail and place substantial rock water bar and anchor rocks

